

MVH2 Series

PROFADER™

Conductive Plastic


Low sliding noise level & Long sliding life

Protection against dust


Horizontal style Control-bar design.

High Quality


All parts are highly precise.

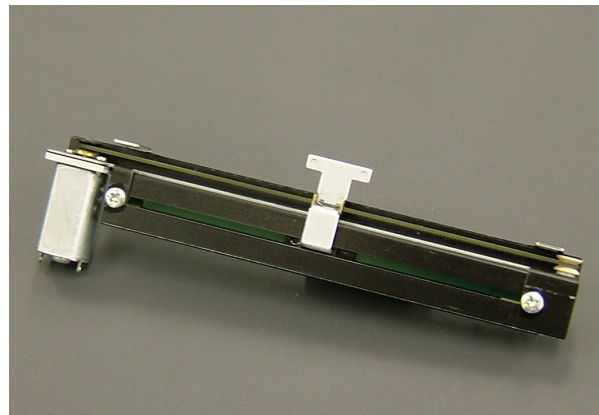

Dimensions

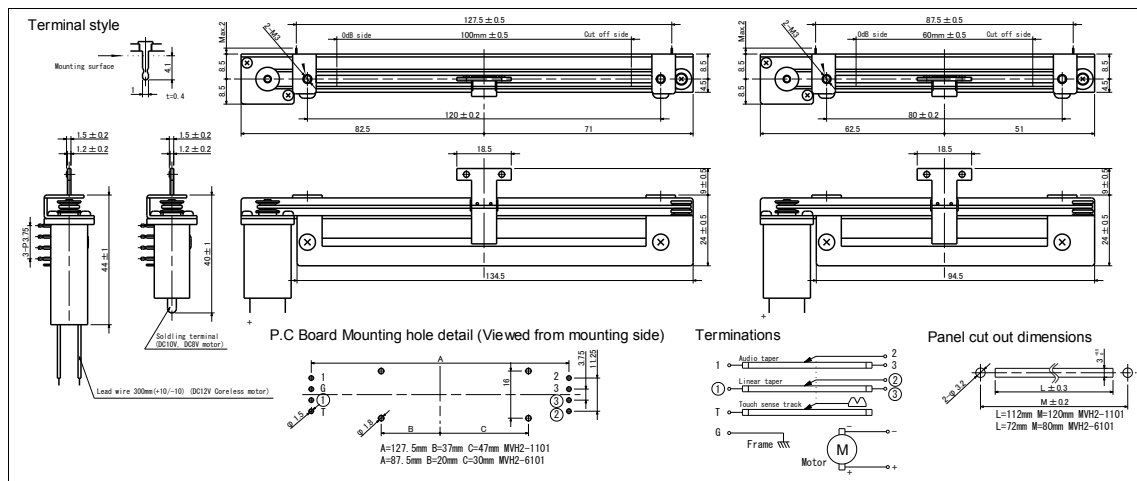

Output Law

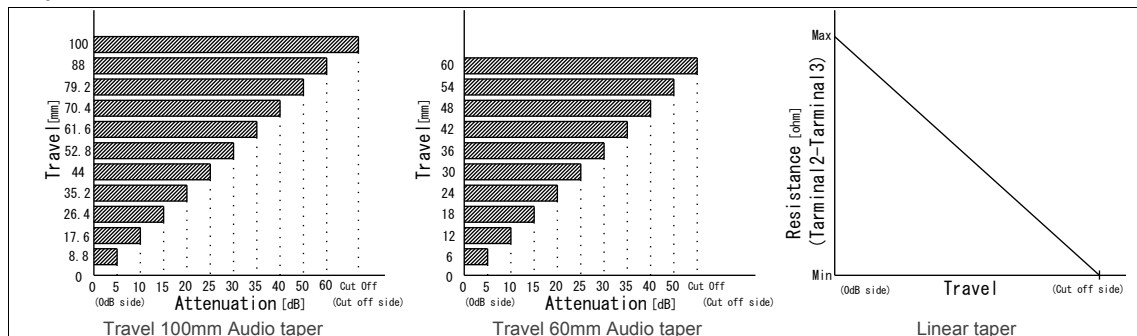


The products and their specifications are subject to change without notice.
TOKYO KO-ON DENPA CO., LTD. www.tkd-corp.com ED01A-201104

Model number

MVH2	- 1101	- B	10K	- J12
Product type	Travel 1101: 100mm 6101: 60mm	Taper B: Linear taper A: Linear + Audio taper	Total resistance	DC-motor J12: DC12V Coreless (NAMIKI) 10V: 10V DC motor (MINEBEA) M8V: 8V DC motor (MABUCHI)

Circuit method

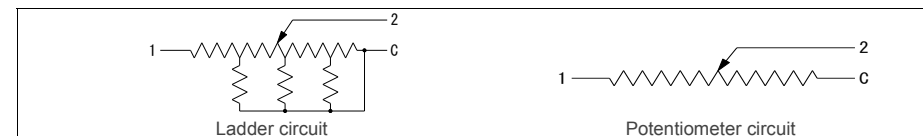

Electrical specifications

	MVH2-1101-B	MVH2-6101-B	MVH2-1101-A	MVH2-6101-A
Circuit (Unbalanced)	1			2
Total resistance (1-C)(1-3)	5k, 10kohm			
Total resistance tolerance	20%			
Taper	Linear (Potentiometer circuit)		Linear (Potentiometer circuit), Audio (Ladder circuit)	
Linearity	±5% (Linear taper)			
Residual resistance	30ohm or less (Linear taper)			
Touch sense track Contact resistance	20ohm or less			
Attenuation accuracy	-	-	0~20dB: ±1.0dB, ~20dB: ±2.0dB (Audio taper)	
Insertion loss	-	-	0.5dB or less (Audio taper)	
Cut off (15Hz)	-	-	95dB Min. (Audio taper)	
Voltage proof	1 Min. at AC500V			
Insulation resistance	50Mohm or more at DC100V			
Max rating	DC20V (0.2W)			
Sliding noise level	47mV or less (by JIS C 6443)			
Sliding life	100,000 Cycles Min. (18cycles/min, Sliding noise level: Less than 100mV)			

Mechanical specifications

	MVH2-1101	MVH2-6101
Stroke length	100mm±0.5mm	60mm±0.5mm
Operating force	0.1~0.3N	
Strength of Nut-Attached	100Ncm	
Attached Parts	M3 screw (Length: Panel thickness + 3~5mm)	
Stopper strength	30N	
Push-pull strength	30N	

General specifications

	MVH2 Series
Temp.range	10V DC motor: -10 to +70 deg C (Operating), -15 to +75 deg C (Storage) Other motor: -10 to +50 deg C (Operating), -15 to +60 deg C (Storage)
Relative humidity	90%RH (No condensation)

Note

- * Solder heat resistance: 350deg C max, 5sec max, 2 times. (Manual soldering only)
- * Please take care during soldering that the smoke from the solder does not flow inside a fader.
- * If the flux sticks to a resistor board, it may cause a trouble with the fader.
- * Move to one end in Control-bar on the occasion of knob wearing, and can break into it slowly.