


·Type designation

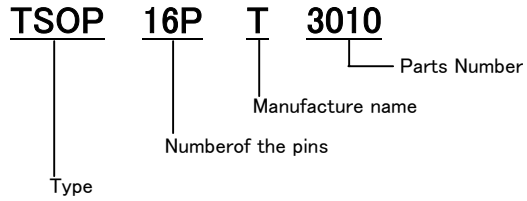


·Rating

Type name	Rated power (70°C)		Highest usable voltage (V)	Extreme highest overload voltage (V)
	mW/element	mW/network		
SOP 8P	60	200	77	150
SOP 16P	60	400	77	150

·Dimensions

	SOP8PA	SOP8PB	SOP16P
A	MAX5.79	MAX5.79	MAX11.20
C	8±0.2	7±0.2	7.6±0.2
D	1.2±0.1	0.7±0.1	1.0±0.1
F	0.5±0.2	0.3±0.1	0.3±0.2
K	0.7±0.2	0.4±0.2	0.7±0.2

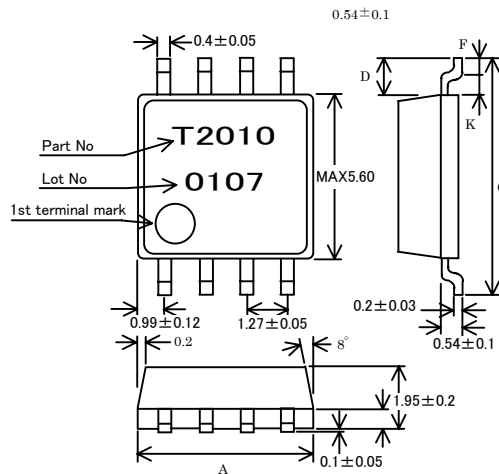

·Resistance vs temperature characteristic

T·C·R ppm/°C

Temperature characteristic	R	S	E	C
Absolute value	±5	±10	±25	±50
Relative value	1,2,3,5	1,2,3,5,10	1,2,3,5,10	1,2,3,5,10

·Tolerance for resistance

Tolerance	A	B	C
Absolute value (%)	±0.05	±0.1	±0.25
Relative value (%)	0.025,0.05,0.1	0.025,0.05,0.1,0.2	0.025,0.05,0.1,0.25,0.5